

HYPERSPIKE® HS-14

ACOUSTIC HAILING DEVICE



151 dB SPL PEAK ACOUSTIC OUTPUT

COMMUNICATION RANGE:
2000m

NARROW ACOUSTIC BEAM:
+/- 12° @ 2kHz

FREQUENCY RESPONSE:
300 Hz - 8kHz, OPTIMIZED
FOR HUMAN VOICE

STI 0.81 OUT OF 1.0

BUILT-IN HIGH FREQUENCY
ALERT TONE

INTERNAL 16 GB FILE PLAYER

BUILT-IN THERMAL
MANAGEMENT SYSTEM
TO PREVENT THERMAL
SHUTDOWN

INDUSTRY LEADING TECHNOLOGY

Engineered with proprietary HyperSpike® technology, the HS-14 is a self-contained, lightweight, portable acoustic hailer for communicating long distances and penetrating high background noise environments. With an acoustic footprint of up to 2000 meters, the HS-14 packs a peak acoustic output of 151 dB to ensure clear and authoritative voice commands are clearly understood.

Powerful deterrent tones which enhance military and security personnel's response capabilities are easily accessible with the built-in high frequency alert tone.

Weighing only 37 lbs., the rugged, lightweight carbon fiber reinforced housing is easily transported and withstands extreme maritime and desert environments.

An exceptional STI rating of 0.81 out of 1.0 combined with an extended frequency range ensures authoritative voice commands are clearly delivered to the intended target.

APPLICATIONS

- Military Security
- Small Craft & Vehicles
- Perimeter Protection
- Law Enforcement
- Crowd Control
- Fire Services
- Wildlife Management
- Maritime
- Border & Port Protection

ULTRA-HYPERSPIKE.COM

HS-14 Specifications

ORDERING INFORMATION

Model No. 90110A


(see price sheet for selectable options)

INCLUDED WITH THE HS-14

- Record/Play Microphone
- Integrated MP3 Player
- Hearing Protection
- HS Audio Optimizer Software
- Saddle Bracket

OPTIONAL ACCESSORIES

- Tripod
- Remote Controller
- Ship Rail Clamp (Stainless Steel)
- Transit Case

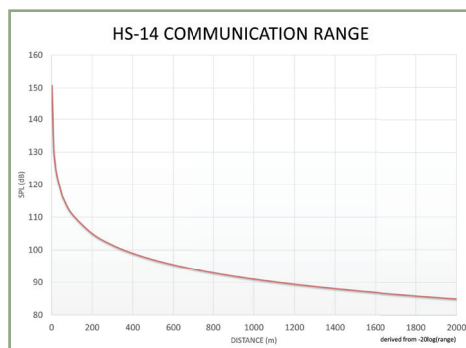

ACOUSTIC SPECIFICATIONS

Sound Pressure Level, Peak^A

151 dB @ 1m (LL Peak Max)

Usable Range^B

Up to 2000 m (see graph)

Beam Width

+/- 12° (24° conical @ 2 kHz/-3 dB)

Frequency Response

300 Hz - 8 kHz (see graph)

PHYSICAL SPECIFICATIONS

Dimensions - Emitter Head

14.7" Diameter x 16.5" Depth
(37.3 cm Diameter x 41.9 cm Depth)

Cross-Sectional Area

169.7 in²

Weight - Emitter Head

37 lbs (16.8 kg)

Housing Material

Carbon Fiber Reinforced

Housing Color

Navy Gray (04), Desert Tan (02) or custom

POWER REQUIREMENTS

Power Input

10-34 VDC

Power Consumption

425W Average (Alert Tone)
750W Peak (Alert Tone)

ENVIRONMENTAL

High/low Operating Temperature^C

MIL-STD-810G, Method 501.5 & 502.5,
+60°C, -20°C Procedure II

Vehicle Vibration

MIL-STD-810G, Method 514.6 Procedure I

Shipboard Vibration^C

MIL-STD-167-1A Type I

Shipboard Shock^C

MIL-STD-901D, Grade B Type A

Rain (Blowing)^C

MIL-STD-810G, Method 506.5 Procedure I

Dust (Blowing)^C

MIL-STD-810G, Method 510.5 Procedure I

Humidity^C

MIL-STD-810G, Method 507.5 Procedure II

Salt Fog^C

MIL-STD-810G, Method 509.5

Safety Standard^D

MIL-STD-1474D

EMC Standard^D

FCC Part 15 Class A Radiated and
Conducted Emissions

- A) Using built-in alert tone
B) Ambient environmental conditions
C) Verified by independent third party test lab
D) Designed to meet stated specifications



BALKAN Teknoloji Servisleri Ltd. Şti.

Cumhuriyet Mahallesi, Çimen Sokak, No: 9/A,
Üsküdar, İstanbul, 34699 TÜRKİYE

Telefon : +90 533 243 55 07

E-mail : info@balkanteknoloji.com.tr

Web : www.balkanteknoloji.com.tr

