

# HYPERSPIKE® HS-18

## ACOUSTIC HAILING DEVICE



156 dB SPL PEAK ACOUSTIC OUTPUT

COMMUNICATION RANGE:  
2000m

NARROW ACOUSTIC BEAM:  
+/- 5° @ 2kHz

FREQUENCY RESPONSE:  
245 Hz - 10kHz, OPTIMIZED  
FOR HUMAN VOICE

STI 0.96 OUT OF 1.0

BUILT-IN HIGH FREQUENCY  
ALERT TONE

PAN & TILT CAPABLE

SELF-CONTAINED  
ELECTRONICS

COMPACT CARBON FIBER  
CONSTRUCTION

### INDUSTRY LEADING TECHNOLOGY

Engineered with proprietary HyperSpike® technology, and the innovative Opti-Port equipment bay, the customizable HS-18 is an ideal sound reinforcement solution. With 156 dB of forceful acoustics, operators have the ability to issue clear, authoritative verbal commands and cut through high background noise.

Security operations are enhanced with the HS-18's first-to-market, Opti-Port equipment bay. Easily configured with an optional video camera, or search light, mission-critical sensors give security personnel additional time and valuable information to evaluate a potential threat.

With the Opti-Port equipment bay located in the center of the HS-18, optional sensors are inherently centered in the middle of the acoustic wave, minimizing calibration and maintenance time.

With an acoustic footprint of 2000m, clear, intelligible and authoritative commands are broadcast to intended targets with industry leading clarity.

### APPLICATIONS

- Military Security
- Maritime & Port Security
- Perimeter Protection
- Law Enforcement
- Oil & Gas Platforms
- Airports & Runways
- Commercial Shipping
- Yacht & Cruise line Security

[ULTRA-HYPERSPIKE.COM](http://ULTRA-HYPERSPIKE.COM)



# HS-18 Specifications

## ORDERING INFORMATION

Model No. 90096A



(see price sheet for selectable options)

## INCLUDED WITH THE HS-18

- Record/Play Microphone
- Integrated MP3 Player
- HS Audio Optimizer Software
- Saddle Bracket

## OPTIONAL ACCESSORIES

- Thermal Imager
- Remote Operations Controller
- Ship Rail Clamp (Stainless Steel)
- Daylight Camera
- Programmable Search Light
- Transit Case

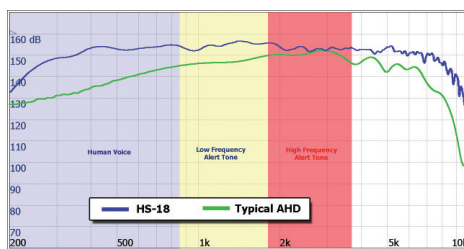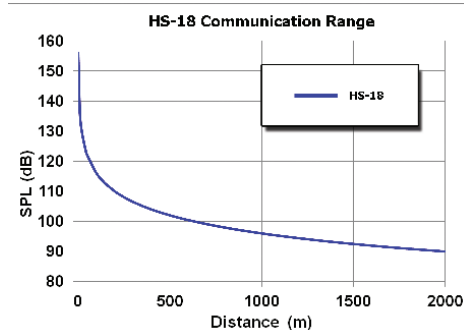

## ACOUSTIC SPECIFICATIONS

### Sound Pressure Level, Peak

156 dB A-weighted @ 1m

### Usable Range<sup>A</sup>

Up to 2000m (see graph)

### Beam Width

+/- 5° (10° conical @ 2 kHz/-3 dB)

### Frequency Response

245 Hz - 10 kHz (see graph)

## PHYSICAL SPECIFICATIONS

### Dimensions - Emitter Head

20" Diameter x 18.3" Depth  
(50.8 cm Diameter x 46.5 cm Depth)

### Dimensions - Opti-Port Bay

5.75" Diameter x 5.5" Depth  
(14.6 cm Diameter x 14.0 cm Depth)

### Weight - Emitter Head

90 lbs (40.8 kg)

### Housing Construction

Carbon Fiber

### Housing Color

Navy Gray (04), Desert Tan (02) or custom

## POWER REQUIREMENTS

### Power Input

100-250 VAC, 50/60 Hz

### Current Draw

2.4 Amps, 110V, typical (voice)  
4.0 Amps, 110V, maximum (tone)

## ENVIRONMENTAL<sup>B</sup>

### High/low Operating Temperature<sup>C</sup>

MIL-STD-810F, Method 501.4 & 502.4,  
+50°C, -33°C

### Random Vibration<sup>C</sup>

MIL-STD-810F, Method 514.4

### Shipboard Vibration<sup>C</sup>

MIL-STD-167-1A

### Shipboard Shock<sup>C</sup>

MIL-STD-901D, Class I

### SRS Shock (Functional)<sup>C</sup>

MIL-STD-810F, Method 516.5

### Rain (Blowing)<sup>C</sup>

MIL-STD-810F, Method 506.4

### Operating Humidity<sup>C</sup>

MIL-STD-810F, Method 507.4

### Salt Fog<sup>C</sup>

MIL-STD-810F, Method 509.4

### Drop Survivability<sup>C</sup>

36 Inches

### Safety Standard

MIL-STD-1474D

### EMC Standard

FCC Part 15 Class A Radiated and  
Conducted Emissions

A) Ambient environmental conditions

B) Designed to meet harsh, maritime environmental conditions

C) Verified by independent third party test lab



## BALKAN Teknoloji Servisleri Ltd. Şti.

Cumhuriyet Mahallesi, Çimen Sokak, No: 9/A,  
Üsküdar, İstanbul, 34699 TÜRKİYE

Telefon : +90 533 243 55 07

E-mail : info@balkanteknoloji.com.tr

Web : www.balkanteknoloji.com.tr

